




HIGH TEMP REFRIGERATED AIR DRYER

Features an integrated aftercooler that is complete with a CLEARPOINT pre-filter and drain for maximum inlet compressed air processing and energy efficiency

NOTE: Incoming air must be cooled to 210°F or less.

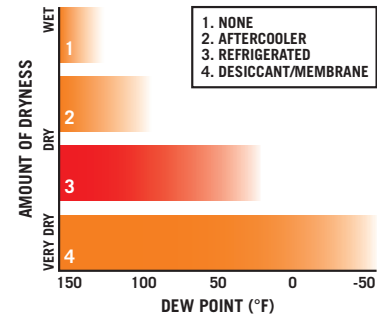

- FULL 2 YEAR WARRANTY
- ALUMINUM HEAT EXCHANGER
- VARIOFLOW HOT GAS BY-PASS VALVE
- LARGE CROSS SECTION OF FLOW CHANNELS
- MAINTENANCE FRIENDLY

PART #	CONNECTION	MAX CFM	VOLTAGE/PHASE
AC CHR-20 1/115	1/2" NPT-F	20	115 / 1
AC CHR-30 1/115	1/2" NPT-F	30	115 / 1
AC CHR-40 1/115	1/2" NPT-F	40	115 / 1
AC CHR-50 1/115	1/2" NPT-F	50	115 / 1
AC CHR-75 1/115	1" NPT-F	75	115 / 1
AC CHR-100 1/115	1" NPT-F	100	115 / 1
AC CHR-150 1/115	1 1/4" NPT-F	150	115 / 1
AC CJRD-200 1/230	1 1/4" NPT-F	200	230 / 1
AC CHR-250 1/230	1 1/2" NPT-F	250	230 / 1
AC CHR-300 1/230	1 1/2" NPT-F	300	230 / 1
AC CHR-350 1/230	2" NPT-F	350	230 / 1

SERVICE - QUALITY - INNOVATION

380 WEST 1ST STREET, DRESSER, WI 54009 // 800.762.2247 // 651.462.3440 // WWW.C-AIREINC.COM