



**OIL LUBRICATED
TANK SERIES**

PRODUCT NUMBERING SYSTEM

S265H - HD1 - 115

MOUNTING OPTIONS

H: Horizontal Tank

PHASE

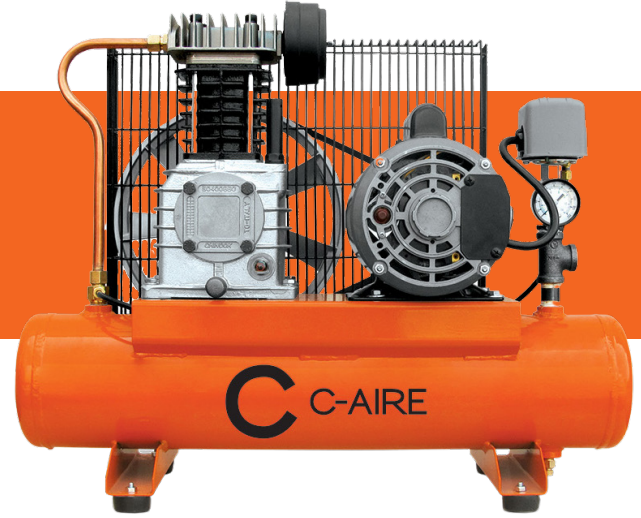
1: Single Phase
3: Three Phase

VOLTAGE






115
230 (208/230V)
460

ADDITIONAL OPTIONS

P: Prewired Power Cord
S: Prewired Magnetic Starter
U: 30-40 psi Pressure Switch
(Also available in PU and SU)



- ✓ Built for longevity
- ✓ Appropriate for single or multiple-valve systems
- ✓ Great for older sprinkler systems
- ✓ Low cost of ownership
- ✓ 12-month unit warranty
- ✓ 3-year pump warranty
- ✓ Tank drain and full synthetic oil included
- ✓ Add a new automatic air maintenance device from C-Aire
- ✓ 2D & 3D CAD files available

SYSTEM SIZE		PSI	GAL.	TECHNICAL SPECIFICATIONS		ACCESSORIES AVAILABLE	
Pre-Action		10	1220	HP	1.5		Automatic Air Maintenance Device Part: CAMD1 Pack of 16: CAMD1-16PK
Low Pressure		18	610	PRESSURE SWITCH	On @ 70 PSI, OFF @ 100 PSI Optional 30-40 PSI		1/2" x 30" stainless steel flexible hose Part: DT 3005 H-1PK Pack of 5: PART DT 3005 H-5PK
Standard Pressure		40	305	CFM	3.2 @ 10 PSI		1/2" x 36" flexible hose Part: DT 3605 H Pack of 5: PART DT 3605 H-5PK
ELECTRICAL SPECIFICATIONS				PUMP	2 Cylinder		1/2" x 48" flexible hose Part: DT 4805 H Pack of 5: PART DT 4805 H-5PK
PHASE/ VOLTS	RUNNING AMPS	BREAKER SIZE		CYLINDERS	Cast Iron		1/2" x 72" flexible hose Part: DT 7205 H Pack of 5: PART DT 7205 H-5PK
1/115	17.4	30 Amp		OUTLET	1/2" NPT		
1/230	8.8	15 Amp		DIMENSIONS (LxDxH)	27" x 12" x 22"		
3/230	4.25	10 Amp		WEIGHT	85 lbs.		
3/460	2.13	3 Amp		TANK SIZE	3 Gallon Horizontal		